

Centrifugal fan Type FG 801 N4A LG 270



PRODUCT NO.: 24571

Location: 6C

Condition: Unused


Length: 1200 mm

Width: 1200 mm

Height: 1420 mm

Weight: 621 kg

Gallery

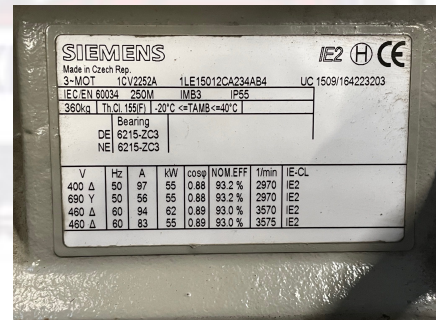



F.lli Ferrarri Ventilatori Industriali S.p.A.
via Machetti 28
Arzignano 36075 (VI) ITALY

Telephone +39 0444 471100
Fax +39 0444 471105
E-Mail info@ferrarri Ventilatori.com
Web <http://www.ferrarri Ventilatori.it/>
Customer -
Contact - Item 2
Project Unlabeled Project Reference FG 801 N
Quantity 1

Direct Driven Centrifugal Fan with Inverter

	Technical Features
Temperature	15°C
Altitude	0 m
Density	1,226 kg/m ³
Capacity	10,000 m ³ /h
Pressure	11,300 Pa Static Discharge
Fan Model	FG 801 N
Capacity	10,000 m ³ /h (100%)
Static pressure	11,500 Pa @ 1,226 kg/m ³
Dynamic pressure	950 Pa @ 1,226 kg/m ³
Total pressure	12,450 Pa @ 1,226 kg/m ³
Total pressure	12,450 Pa @ 1,226 kg/m ³
Velocity	90,77 m/h
Inverter speed	3653 rpm
Absorbed power	40,2 kW @ 1,226 kg/m ³
Absorbed power	40,2 kW @ 1,226 kg/m ³
Service Factor	37 %
Power installed	50 kW (1250M 2 pole)
Total Efficiency	86 %
Static Efficiency	79 %
Arrangement	4
Class	-
Maximum speed	3350 rpm
Moment of inertia	33 (I) kgm ²
Weight	305 kg
Axial thrust	873 N
Discharge thrust	946 N
Starting time	3,0 s
Sound power level	108 dB Ambient (Density=1,226 kg/m ³)
Sound pressure level	90 dB Ambient (Density=1,226 kg/m ³ , Distance=1m)
Sound pressure level	90 dB Ambient (Density=1,226 kg/m ³ , Distance=3m)
Frequency	63 125 250 500 1k 2k 4k 8k Hz
Sound power in-duct	94 97 98 101 100 98 94 89 dB inlet
Sound power in-duct	97 100 101 104 105 101 97 92 dB outlet

F.lli Ferrarri reserves the right to modify, integrate, withdraw or suspend without notice and at any time the technical and commercial proposals made by this software and gives the user no rights in claims of any sort.
24/03/2015 10:16:01 Page 3 / 4
V.3.1.17.0 D-I-T-C-69

