

Ebmpapst K2E220-RA38-01 AC centrifugal Fan module - RadiCal



PRODUCT NO.: 22362

Location: 1D

Condition: New

Length: 270 mm

Width: 270 mm

Height: 92 mm


Weight: 2 kg

Brand: Ebmpapst

Description


Technical Description: Motor size 68 - Size 220 mm - PA plastic - Number of blades 7 - Direction of rotation Clockwise, viewed toward rotor - Protection IP44 - Max permitted ambient temp. for motor + 80 °C - Minimum permitted ambient temp. for motor - 40 °C - Ball bearing - Nominal data: Phase 1~ - Type of voltage AC - Nominal voltage 230V - Frequency 50 Hz - Motor protection Thermal overload protector TOP - Conformity with EN 60335-1/CE standards - CCC/EAC Approved - CE - pcs. - Price a pcs.




Gallery

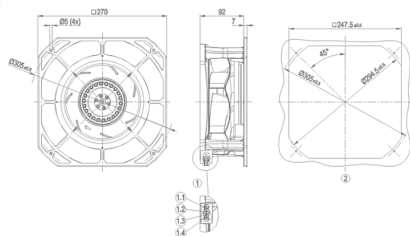

Product drawing

- 1 tyco coded plug system
- 4-pole connector housing tyco 926305-7
- 4x plug pin tyco 926 685-1
- Mating connector (not included in scope of delivery)
- 4-pole connector housing tyco 926298-6
- 4x socket tyco 926 884-1
- 1.1 PE
- 1.2 L
- 1.3 N = capacitor
- 1.4 Capacitor
- (capacitor wired internally)
- 2 Mounting dimensions

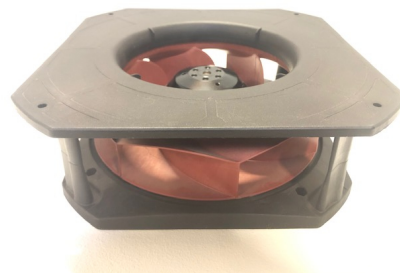

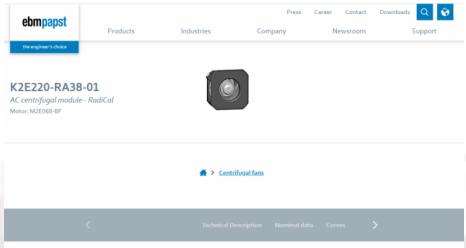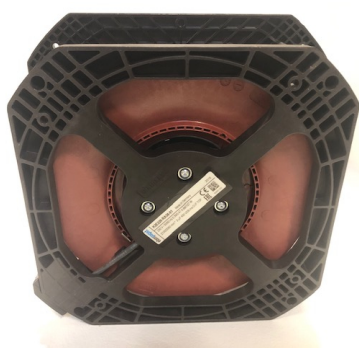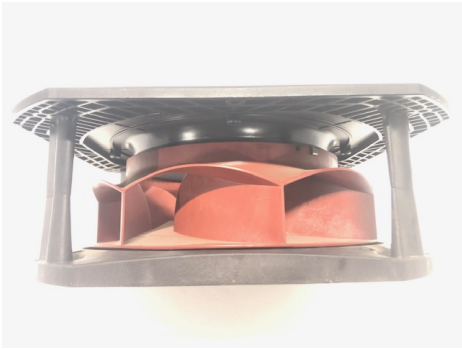


Touch current according to IEC 60950 (measuring circuit Fig. 4, TN system)	< 0,75 mA
Electrical hookup	Plug
Motor protection	Thermal overload protector (TOP) internally connected
with cable	Variable
Protection class	I (with customer connection of protective earth)
Motor capacitor according to EN 60252-3 in safety protection class	S0
Conformity with standards	EN 60335-1 / CE
Approval	CCC / EAC

Nominal data		
Phase		1~
Type of voltage		AC
Nominal voltage	in V	230
Frequency	in Hz	50
Type of data definition		maximum load
Valid for approval / standard		CE
Speed	in min ⁻¹	2100
Power input	in W	88
Current draw	in A	0,39
Starting current	in A	0,51
Motor capacitor	in µF	2
Capacitor voltage	in V	450
Capacitor standard		50
Min. back pressure	in Pa	0
Min. ambient temperature	in °C	-25

Technical Description

Weight	2 kg
Motor size	68
Size	220 mm
Rotor surface	Painted black
Impeller material	PA plastic
Housing material	PA plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44 / installation- and position-dependent as per EN 60034-5
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing

Curves




Air flow 50 Hz

Measured values

n	q _v	P _e	I	LpA _{eq}
	in min ⁻¹	in W	in A	in dB(A)
1	2350	80	0,36	53
2	2231	86	0,38	54
3	2100	88	0,39	52
4	2203	85	0,38	55

Curves



Air flow 60 Hz

Measured values

n	q _v	P _e	I	LpA _{eq}
	in min ⁻¹	in W	in A	in dB(A)
1	2450	102	0,46	60
2	2212	106	0,46	54
3	2050	107	0,47	51
4	2233	105	0,45	56

Air flow 60 Hz