

GRX®

EG SORTING GRAB

Bent body in Strenx® 700
high strength
structural steel


Claws in Hardox® 450
wear-resistant steel

Check valve as standard
on GRX 15 EG, 20 EG, 25 EG
& 30 EG

Accumulator optional on
GRX 20 EG, 25 EG & 30 EG



Universal hole pattern for
Angled excavator attachment | RMR compact rotator | WDR worm drive

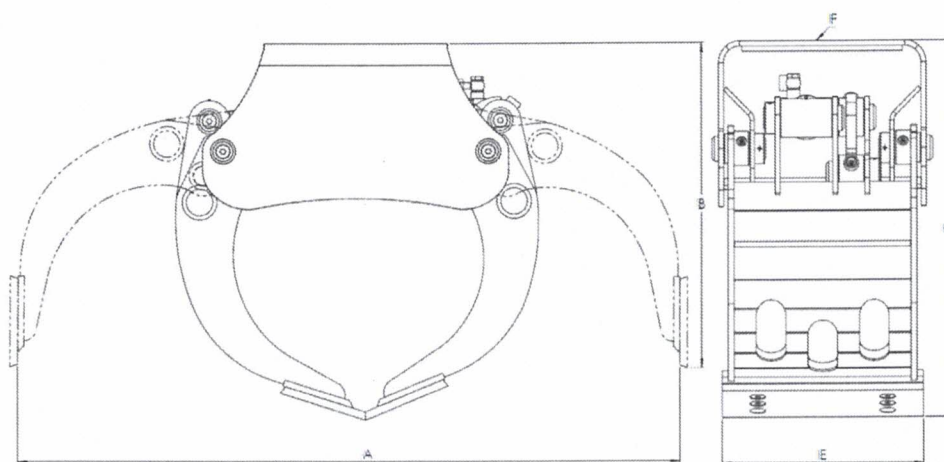

**MAXIMUM STRENGTH.
IDEAL WEIGHT.**

	GRX 10 EG	GRX 15 EG	GRX 20 EG	GRX 25 EG	GRX 30 EG
A	949	1150	1300	1500	1702
B	451	497	631	735	808
C	520	616	731	840	964
E	343	366	395	439	700
F	140x140 M16 Centre Ø110	140x140 M16 205/10 M12 Centre Ø110	140x140 M16 270/16 M16 Centre Ø145	140x140 M16 270/16 M16 Centre Ø145	270/16 M16 340/16 M20 Centre Ø180