


TELESCREEN

40ft RADIAL STOCKPILER

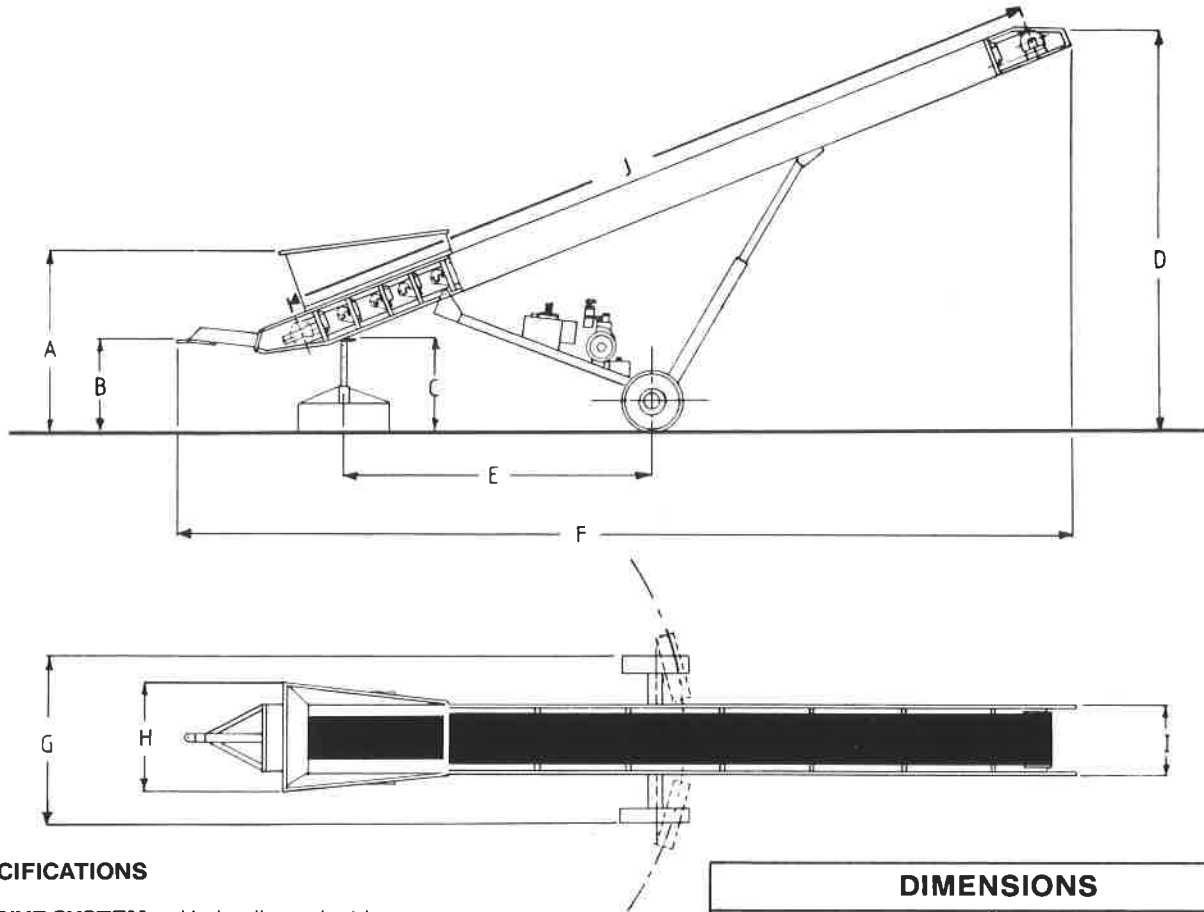

SPECIFICATIONS

DRIVE SYSTEM	Hydraulic or electric.
POWER SOURCE	From Telescreen or self powered either by Lister ST2 diesel engine or 5h.p., 1440 R.P.M. electric motor.
HYDRAULIC TANK CAPACITY	25 gallons (113 litres).
TYRE SIZE	12.5/80 - 15, 14 ply rating.
BELT	24" wide made of best quality bonded rubber.
BELT SPEED	320 ft/min (97.5 m/min.)
ROLLERS	4" heavy duty troughing rollers with sealed for life bearings.
HOPPER CAPACITY	2.30 cu.yds. (1.75 cu.m.)

DIMENSIONS

	MACHINE FULLY RAISED		MACHINE LOWERED	
	IMP	METRIC	IMP	METRIC
A	8'-0"	2438	6'-11"	2108
B	5'-1"	1549	4'-0"	1220
C	4'-3"	1295	3'-3"	990
D	18'-0"	5486	10'-0"	3048
E	13'-10"	4216	13'-10"	4216
F	39'-6"	12039	41'-0"	12496
G	7'-2"	2184	7'-2"	2184
H	4'-6"	1372	4'-6"	1372
I	3'-0"	914	3'-0"	914
J	36'-0"	10973	36'-0"	10973

Telescreen (Ireland) Ltd.,
Export Department:
Blackchurch, Naas Road, Rathcoole,
Co. Dublin. Ireland.
Telephone: (01) 589532, 589829, 589088
Telex: 30679

SOLD AND SERVICED BY: